

PENDANT
LAMPE SUSPENDUE (page 4)
COLGANTE (page 7)


MODEL/MODÈLE/MODELO #25335-71



Questions, problems, missing parts? Before returning to your retailer, call our customer service department at 1-800-265-9960, 9 a.m.-5 p.m., EST, Monday-Friday. cs@checkolite.com

PACKAGE CONTENTS

Part	Description	Quantity
A.	Glass shade, mounting bracket, mounting screws, green screw, cord fastener, canopy, cord, decorative nuts	1
B.	Outlet box screws and wire nuts	1 Pk

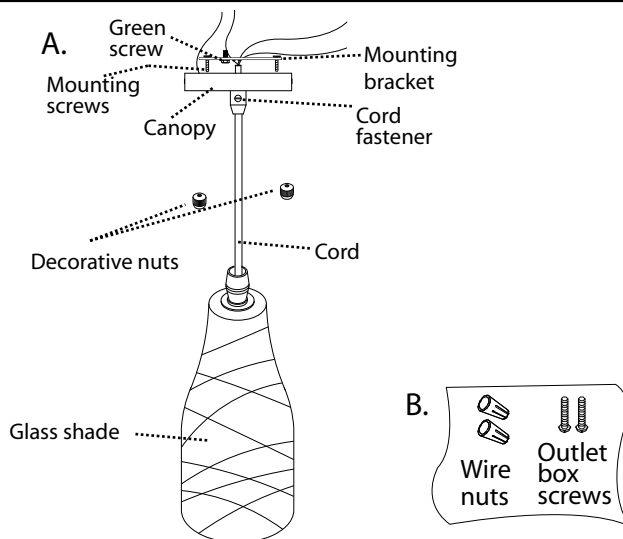

⚠️ WARNINGS AND CAUTIONS

- **TURN OFF ELECTRICITY** at main fuse box (or circuit breaker box) before beginning installation by switching circuit breaker off or removing fuse.
- If in doubt about electrical installation, consult a licensed electrician.

PREPARATION

Before beginning **assembly and installation** of product, make sure all parts are present. Compare parts with package contents list and diagram above. If any part is missing or damaged, do not attempt to assemble, install or operate the product. Contact customer service for replacement parts.

Estimated Assembly Time: 25 minutes

Tools Required for Assembly: **Phillips screwdriver and electrical tape** (not included)

Helpful Tools: **Wire cutter** (not included)

ASSEMBLY AND INSTALLATION INSTRUCTIONS


Step 1: TURN OFF ELECTRICITY at main fuse box (or circuit breaker box) before beginning installation by switching circuit breaker off or removing fuse. MIN 90° C SUPPLY CONDUCTORS. CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR.

Step 2: To adjust length of cord, unscrew cord fastener (15) slipping cord through it to shorten or lengthen cord to desired length. Fasten mounting bracket (7) onto the outlet box (8) using two outlet box screws (9). Ensure that all supply circuit wires protrude out of the outlet box (8).

Step 3: Strip ¾ in. of insulation from wire ends of fixture and of supply circuit wires. Attach ground supply circuit wire (10) and both ground fixture wires (11) to the mounting bracket (7) with the green screw (12) provided. (Alternatively, if there is no ground supply circuit wire, only attach the ground fixture wires (11) to the mounting bracket (7) with the green screw (12)). Never connect ground wire to black or white power supply wires. Twist stripped wire ends of fixture and supply circuit wires together black to black (hot) (3) and white to white (neutral) (4). Twist on wire nuts (5). Tape wire nuts and wires together. Carefully tuck connected wires and wire nuts into outlet box.

Step 4: Place the canopy (13) onto the mounting bracket (7). Both ends of the mounting screws (6) are to come out through the canopy holes (14). Securely mount canopy (13) to ceiling by tightening decorative nuts (16) onto mounting screws (6).

Step 5: Install light bulb. Only use bulb of the specified type and maximum rated wattage or less.

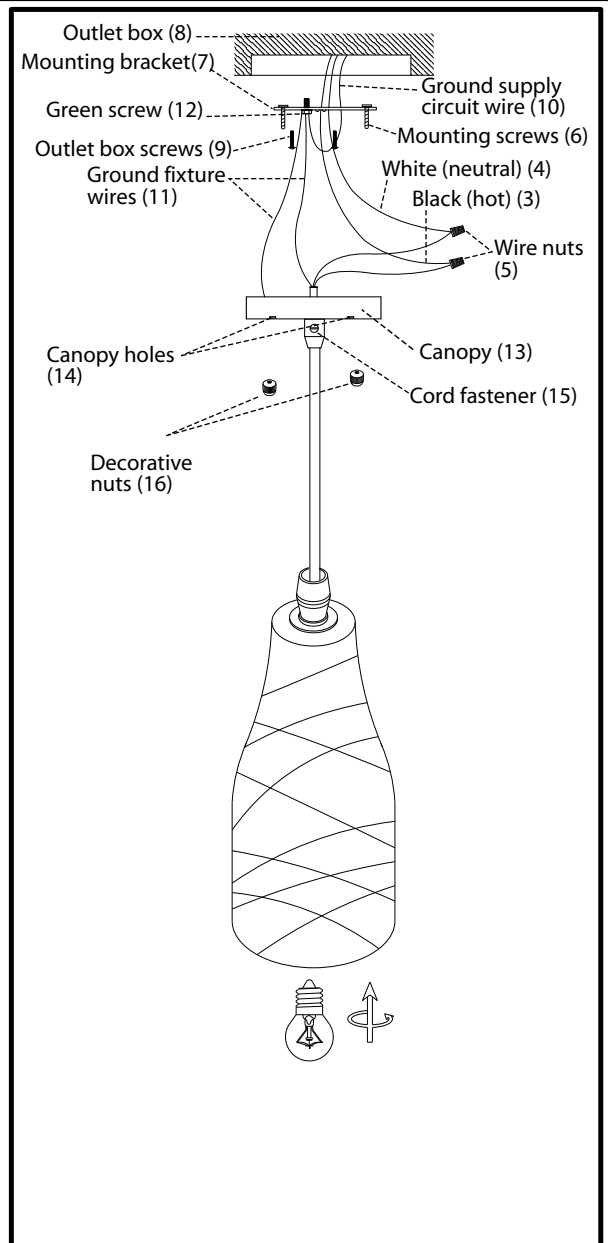

CARE AND MAINTENANCE

- Clean with soft dry cloth. Do not use abrasives.
- Bulb replacement uses 1 x 60 watt type A medium base bulb. Shut off main power supply before replacing bulb.

TROUBLESHOOTING

Problem	Possible Cause	Corrective Action
Bulb won't light.	<ol style="list-style-type: none"> 1. Bulb is burnt out. 2. Power is off. 3. Faulty wire connection 4. Faulty wall on/off switch 	<ol style="list-style-type: none"> 1. Replace light bulb. 2. Check if power supply is on. 3. Check wiring. 4. Test or replace wall on/off switch.

WARRANTY

Checkolite International Inc, a New Jersey Corporation, having its principal place of business at 142 Charles St., Jersey City, NJ 07307 (Checkolite) warrants its products (the “Products”) as follows:

1. Limited Warranty.

Manufacturer warrants that the Products sold hereunder will be free from defects in material and workmanship for a period of one (1) year from the date of purchase. If the Products do not conform to this Limited Warranty during the warranty period (as herein above specified), Buyer shall notify Manufacturer in writing of the claimed defects and demonstrate to Manufacturer’s satisfaction that said defects are covered by this Limited Warranty. If the defects and proof of purchase are properly reported to Manufacturer within the warranty period, and the defects are of such type and nature as to be covered by this warranty, Manufacturer shall, at its own expense, furnish replacement Products or, at Manufacturer’s option, replacement parts for the defective Products. Shipping and installation of the replacement Products or replacement parts shall be at Buyer’s expense.

2. Exclusive Obligation.

THIS WARRANTY IS EXCLUSIVE. The sole and exclusive obligation of Manufacturer shall be to repair or replace the defective Products in the manner and for the period provided above. Manufacturer shall not have any other obligation with respect to the Products or any part thereof, whether based on contract, tort, strict liability or otherwise. Under no circumstances, whether based on this Limited Warranty or otherwise, shall Manufacturer be liable for incidental, special, or consequential damages.

3. Other Statements.

Manufacturer’s employees or representatives’ ORAL OR OTHER WRITTEN STATEMENTS DO NOT CONSTITUTE WARRANTIES, shall not be relied upon by Buyer, and are not a part of the contract for sale or this limited warranty.

4. Entire Obligation.

This Limited Warranty states the entire obligation of Manufacturer with respect to the Products. If any part of this Limited Warranty is determined to be void or illegal, the remainder shall remain in full force and effect.

REPLACEMENT PARTS LIST

For replacement parts, call our customer service department at 1-800-265-9960, 9 a.m.-5 p.m., EST, Monday-Friday.

Part	Description
7	Mounting bracket
6	Mounting screws
12	Green screw
5	Wire nuts
9	Outlet box screw

